



2023.09.25

正面电极




厚度: 100nm, 公差: ±10nm

温度温度系数: 40.94025 °C

正面 (+) 蓝色减反膜, 18BB

电压温度系数: -0.261%/°C

背面 (-) 蓝色减反膜, 18BB

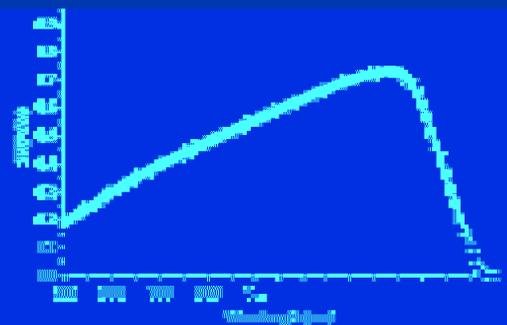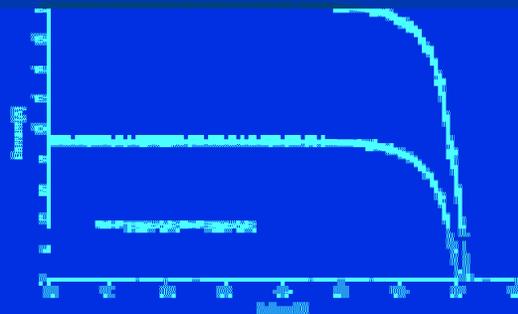

三安光电

三安光电股份有限公司 Sanan Optoelectronic Co., Ltd.

厚度	厚度	厚度	厚度	厚度	厚度	厚度
24.1	18.85	0.624	17.461	0.713	18.307	2
24.2	18.85	0.624	17.461	0.713	18.307	0
24.3	18.85	0.624	17.461	0.713	18.307	1
24.4	18.85	0.624	17.461	0.713	18.307	2
24.5	18.85	0.624	17.461	0.713	18.307	3
24.6	18.85	0.624	17.461	0.713	18.307	4
24.7	18.85	0.624	17.461	0.713	18.307	5
24.8	18.85	0.624	17.461	0.713	18.307	6
24.9	18.85	0.624	17.461	0.713	18.307	7
25.0	18.85	0.624	17.461	0.713	18.307	8
25.1	18.85	0.624	17.461	0.713	18.307	9
25.2	18.85	0.624	17.461	0.713	18.307	10
25.3	18.85	0.624	17.461	0.713	18.307	11
25.4	18.85	0.624	17.461	0.713	18.307	12
25.5	18.85	0.624	17.461	0.713	18.307	13
25.6	18.85	0.624	17.461	0.713	18.307	14
25.7	18.85	0.624	17.461	0.713	18.307	15
25.8	18.85	0.624	17.461	0.713	18.307	16
25.9	18.85	0.624	17.461	0.713	18.307	17
26.0	18.85	0.624	17.461	0.713	18.307	18

三安光电股份有限公司 Sanan Optoelectronic Co., Ltd. 地址: 福建省晋江市安海镇安海大道100号



三安光电

